


LYNX-612A

LYNX-612A is a compact, fan-less and cable-less PC adapting low power Intel® Apollo Lake processor. With 4x LAN(2 isolated LAN) it's easy to connect multi local area network devices in different electric noise environment, legacy RS-232/422/485 also help communicate machine to machine, then collect all edge devices data for analysis, forward analysis result to management center as a edge controller.

Key Features

- Intel® Celeron® Processor
- Support 2x LAN and 1x M.2 for wireless module
- Extended I/O interface of 2x Isolation LAN and 1x RS232/422/485
- Heavy Industry EMC standard
- Support customized appearance (Optional)
- Support extended temperature (Optional)

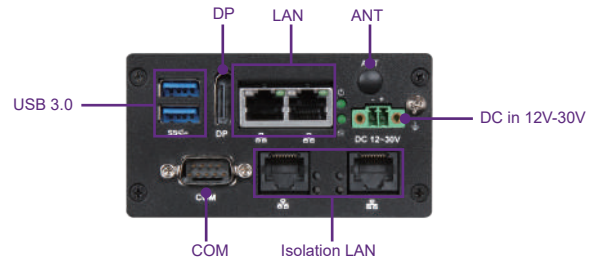

General

Processor	Intel® Celeron® N3350, 2 cores, 1.1GHz/2.4 GHz, 6W TDP
Memory	4GB onboard LPDDR4, 2400 MT/s, non-ECC; up to 8GB (Optional)
Storage	32GB onboard eMMC 5.0 flash; up to 256GB (Optional)
Power Input	12-30VDC (+/- 20%)
Operating System	Windows® 10 IoT (64bit) Yocto v2.7
Expansion	1x M.2 Key E 2230 for wireless module

Basic I/O Interface

Power Connector	1x 2-Pin Terminal Block
Ethernet	2x 10/100/1000 GbE (Intel® I210)
USB	2x USB 3.0
Display	1x DP v1.4 4096 x 2160 @ 60Hz

Extended I/O Interface

COM/ Console	1x RS-232/422/485(BIOS configurable)
Ethernet	2x Gigabyte Ethernet with Isolation

Certification

CE (EN 55032; EN 55024/ EN 55035)

CE (EN 61000-6-4; EN 61000-6-2)

FCC (Part 15 Subpart Class B)

LVD (EN 62368-1)

ENVIRONMENT & MECHANICAL

Storage Temperature	-40 °C ~ 85 °C
Operating Temperature	0°C ~ 50°C
Permissible Humidity	5-95% RH operating, non-condensing 5-95% RH storage, non-condensing
Vibration	1G with DIN-rail mounting 5G with wall mounting (IEC/EN 60068-2-6)
Shock	15G with DIN-rail mounting 50G with wall mounting (IEC/EN 60068-2-27)
Degree of Protection	IP 30
Dimension	100mm (W) x 53.5mm (H) x 92 mm (D)
Net Weight	0.53 KG
Mounting	DIN-rail / Wall Mount

Optional Accessories

Power Adaptor	2-pin terminal block connector to DC jack cable 60W AC to DC Power Adaptor via DC jack
Video Adaptor	DP to VGA/ DP to DVI-D



Portwell, Inc. Headquarters

No. 242, Bo'AI St., Shu-Lin Dist,
New Taipei City 238, Taiwan
Tel: +886-2-7731-8888
Fax: +886-2-7731-9888
E-mail: info@portwell.com.tw
www.portwell.com.tw

American Portwell
(Fremont, CA)
Tel: +1-510-403-3399
E-mail: info@portwell.com
www.portwell.com

Portwell UK Ltd.
Tel: +44-1235-750-760
E-mail: info@portwell.eu
www.portwell.eu

Portwell Japan, Inc.
(Tokyo)
Tel: +81-3-6902-9225
E-mail: info@portwell.co.jp
www.portwell.co.jp

Portwell Japan, Inc.
(Osaka)
Tel: +81-6-4807-7721
E-mail: info@portwell.co.jp
www.portwell.co.jp

European Portwell
Tel: +31-252-620790
E-mail: info@portwell.eu
www.portwell.eu

Portwell Deutschland GmbH
Tel: +49-6103-3008-0
E-mail: info@portwell.de
www.portwell.de

Shanghai Portwell
Tel: +86-21-5771-2505
E-mail: info@portwell.com.cn
www.portwell.com.cn

Portwell Korea, Inc.
Tel: +82-31-450-3043
E-mail: info@portwell.co.kr
www.portwell.co.kr

Portwell India Technology
Tel: +91-80-4168-4255
E-mail: enquiry@portwell.in
www.portwell.in