




WADE-8172

Intel® Celeron® Processor N3350 Based
Mini-ITX Board with VGA, HDMI, LVDS, Dual GbE, USB 3.0,
SATA III, Mini PCIe, M.2

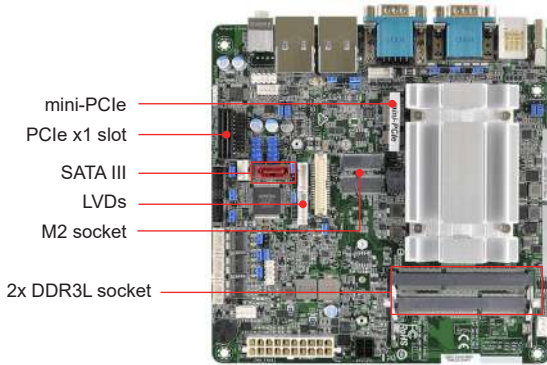


WADE-8172 is based on Intel® Celeron® processor N3350. With dual-channel DDR3L memory and rich I/O sets, WADE-8172 empowers energy-efficient solutions for point-of-sale (POS) and industrial automation applications.

FEATURES

- Intel® Apollo Lake SoC Processor
- Supports Dual Channel DDR3L 1333/1600MHz, 2 x SO-DIMM, up to 8GB system memory
- 1 x HDMI, 1 x D-Sub, 1 x Dual Channel 24-bit LVDS
- 4 xUSB 3.0, 4 x USB 2.0, 1 x SATA3 port
- Supports one PCIe x1(Gen2), one M.2 Key E 2230 with PCIe x1 and USB(Shared) for Wireless, one M.2 Key M 2260/2280 with SATA signal for SSD and one full/half size Mini PCIe socket with PCIe x1 and USB(Shared)

REAR I/O

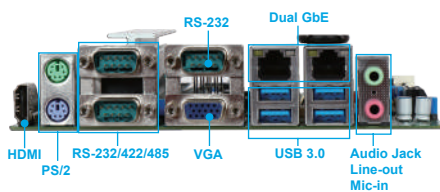

ORDERING GUIDE

AB1-3F78	(R).WADE-8172-N3350 Mini-ITX ESB.Intel® Apollo lake SoC Processor N3350 w/DDR3L/ VGA/LVDS/HDMI/dual GbE LAN/SATA
-----------------	---

PACKING LIST

One Driver CD
One SATA cable
One I/O shield
One WADE-8172 motherboard

GENERAL

Processor	Intel® Celeron® processor N3350 in FCBGA1296 package, 1.1 GHz (2.4 GHz turbo), 2 MB L2, 6W TDP
Chipset	N/A
BIOS	AMI UEFI BIOS
Memory	Support up to 8 GB DDR3L 1600/1333 MHz memory (non-ECC) on 2x 204-pin SO-DIMM socket
Storage Devices	1x SATA III ports
Watchdog Timer	Programmable watchdog timer, time out period from 1 sec to 255 secs.
Hardware Monitoring	- Temperature (CPU & System) - Voltages (CPU Vcore, 12V, 5V, 3.3V, RAM)
Expansion Interface	- 1x PCIe x1 Gen 2 - 1x M.2 Key E 2230 with PCIe x1 and USB(Shared) for Wireless - 1x M.2 Key M 2260/2280 with SATA signal for SSD - 1x full/half size Mini PCIe socket with PCIe x1 and USB(Shared)

I/O INTERFACE

Super I/O	N/A
Audio	- Intel® High Definition Audio interface Realtek® ALC887 High Definition Audio - 1x jumbo jack support Line-out/Mic-in
Ethernet	2x RJ45 connectors on rear I/O (Realtek® RTL8111G)
Serial port	- 2x RS-232/422/485 on rear I/O (selectable by BIOS) - 1x RS-232 on rear I/O - 3x RS-232 on pin header (2.00 mm pitch)
USB	- 4x USB 3.0 on rear I/O - 4x USB 2.0 on pin header (2.54mm pitch)
GPIO	8 bit GPI/GPO

DISPLAY

Graphic Controller	Integrated Intel® Generation 9 Graphics Supports DirectX 12, OpenGL 4.2, OpenCL 2.0
Display Interface	- LVDS: dual channel 24bit LVDS on board connector, up to 1920x1200 - HDMI: resolution up to 3840x2160 - VGA: resolution up to 1920 x 1200 , on rear I/O

Mechanical & Environment

Dimension	170mm(L) x 170mm(W); 6.7"(L)x 6.7"(W)
Power Supply	12V & 19~24V DC input or ATX power input
Environment	- Operating temperature: 0°C to 60°C - Storage temperature: -20°C to 80°C - Relative humidity: 5~95%, non-condensing
MTBF	Over 100,000 hours at 40°C

